

OR

- 4 a. Derive expression for hoop stress and longitudinal stress in thin cylinder. (10 Marks)
 b. A pipe of 500 mm inside diameter and 75 mm thick is filled with a fluid at a pressure of 6 MPa. Find the maximum and minimum hoop stress across the cross section of cylinder. Also sketch the radial pressure and stress distribution across the section. (10 Marks)

Module-3

- 5 a. Classify the beams in detail and also define point of contraflexure in beams. (08 Marks)
 b. A beam is loaded as shown in Fig. Q5 (b). Plot SFD and BMD. (12 Marks)

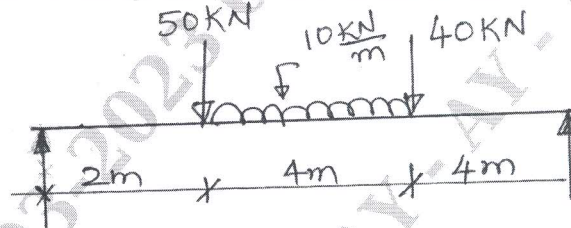


Fig. Q5 (b)

(12 Marks)

OR

- 6 a. Derive simple bending equation with usual assumptions. (12 Marks)
 b. A C.I. beam 25mm × 25mm cross section and 1 m long, supported at its ends fail when a central load of 800 N is applied on it. What UDL will break a Cantilever of same material 50 mm wide, 100 mm deep and 2 m long. (08 Marks)

Module-4

- 7 a. Derive simple torsion equation with usual assumptions. (10 Marks)
 b. A solid shaft is subjected to a maximum torque of 25 kNm. Find the diameter of shaft, if the allowable shear stress and twist is limited to 80 MPa and twist 1° respectively for a length of 20 times diameter of shaft. (10 Marks)

OR

- 8 a. Derive Crippling load for a column with both ends Hinged. (10 Marks)
 b. A solid round bar of 60 mm diameter and 2.5 m long is used as a strut. Find the safe compressive load for the strut. If
 (i) Both ends Hinged.
 (ii) Both ends fixed.
 Take $E = 200$ GPa, Factor of safety = 3.0 (10 Marks)

Module-5

- 9 a. Define theories of failure and explain its relevance in design of members. (08 Marks)
 b. Explain maximum Normal stress theory and Maximum shear stress theories of failure. (12 Marks)

OR

- 10 a. Derive strain energy expression for a structure subjected to axial load. (05 Marks)
 b. A rod of circular section is to sustain a twisting moment of 300 kNm and bending moment of 200 kNm. The material of the shaft is having $\sigma_y = 353$ MPa. Determine Diameter of shaft using Rankines theory and Guest's theory using factor of safety = 3.0. (15 Marks)
