

CBCS SCHEME

21CV33

USN

--	--	--	--	--	--	--	--	--	--

Third Semester B.E. Degree Examination, Dec.2023/Jan.2024 Strength of Materials

Time: 3 hrs.

Max. Marks: 100

Note: Answer any FIVE full questions, choosing ONE full question from each module.

Module-1

- Sketch a typical stress-strain curve for the ductile material and explain briefly the salient features of the curve. (05 Marks)
 - Derive an expression for the deformation of tapered circular bar subjected to axial force. (05 Marks)
 - A steel tube of 30mm external diameter and 20mm internal diameter encloses a copper rod of 15mm diameter to which it is rigidly jointed at each end. If at a temperature of 10°C there is no longitudinal stress, calculate the stresses in the rod and tube when the temperature is raised to 200°C. Take E for steel and copper as $2.1 \times 10^5 \text{ N/mm}^2$ and $1 \times 10^5 \text{ N/mm}^2$ respectively. The value of coefficient of linear expansion for steel and copper is given as 11×10^{-6} per °C and 18×10^{-6} per °C respectively. (10 Marks)

OR

- Define the three elastic constants and derive the relationship between them. (10 Marks)
 - For the state of stress shown in Fig.Q2(b), determine the principal stresses and locate principal planes. Also obtain maximum tangential stress and locate corresponding planes.

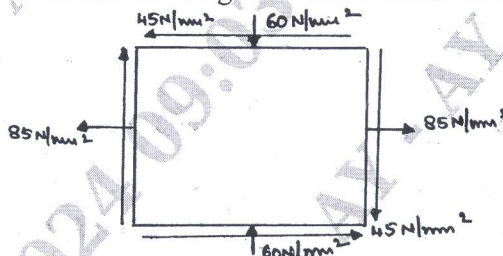


Fig.Q2(b)

(10 Marks)

Module-2

- Define shear force, bending moment and point of contraflexure. (06 Marks)
 - Draw SFD and BMD for a simply supported beam shown in Fig.Q3(b). Also find the maximum bending moment and its location.




Fig.Q3(b)

(14 Marks)

OR

- Establish the relationship between shear force, bending moment and load intensity. (06 Marks)
 - For a cantilever beam subjected to a UDL of intensity w /unit length throughout, plot the SFD and BMD. (06 Marks)

- c. Draw SFD and BMD for the beam shown in Fig.Q4(c) showing the salient points.

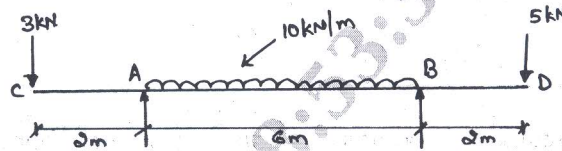


Fig.Q4(c)

(08 Marks)

Module-3

- 5 a. Derive the bending equation with usual notations. (10 Marks)
 b. A cast iron beam is of T-section as shown in Fig.Q5(b). The beam is simply supported on a span of 8m. The beam carries a UDL of 1.5 kN/m on the entire span. Determine the maximum tensile and compressive stress.

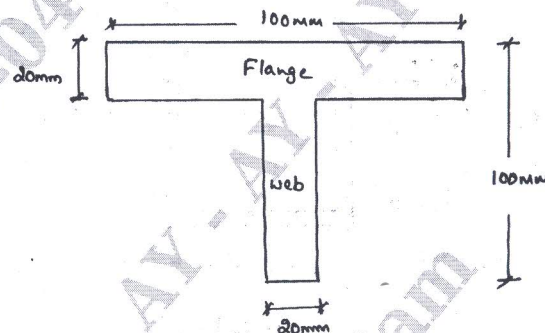


Fig.Q5(b)

(10 Marks)

OR

- 6 a. Define Neutral axis, Section modulus, shear stress and bending stress. (04 Marks)
 b. Write the assumptions made in simple bending theory. (04 Marks)
 c. A hollow box section 120mm wide and 200mm deep is having a uniform wall thickness of 10mm. Obtain the shear stress variation across the cross section. Shear force at the section is 120 kN. Refer Fig.Q6(c).

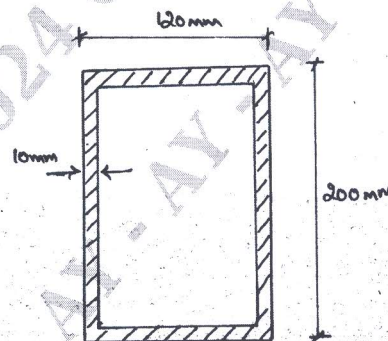


Fig.Q6(c)

(12 Marks)

Module-4

- 7 a. Derive the torsion equation for a circular shaft $\frac{T}{J} = \frac{\tau}{r} = \frac{G\theta}{L}$ with usual notations. (10 Marks)
 b. Find the diameter of the shaft required to transmit 60 kW at 150 rpm. If the maximum torque exceeds 25% of the mean torque for a maximum permissible shear stress of 60 MN/mm². Also find the angle of twist for a length of 4m. Take $G = 80$ GPa. (10 Marks)

OR

- 8 a. Derive Lamé's equation for radial and hoop stresses for thick cylinder subjected to internal and external fluid pressures. (10 Marks)
- b. A thin cylindrical shell 1m in diameter and 3m long has a metal wall of thickness 10mm. It is subjected to an internal fluid pressure of 3 MPa. Find the circumferential and longitudinal stresses in the wall. Determine the changes in length, diameter and volume of the cylinder. Also find the maximum shear stress in the cylinder. Take $E = 210 \text{ GPa}$ and $\mu = 0.3$. (10 Marks)

Module-5

- 9 a. Derive the Euler's equation for buckling load on a column with both ends hinged using usual notations. (10 Marks)
- b. Derive an expression for slope and deflection in a simply supported beam subjected to UDL throughout. Calculate maximum slope and deflection. (10 Marks)

OR

- 10 a. Define :
 i) Buckling load ii) Effective length iii) Slenderness ratio. (06 Marks)
- b. Differentiate between short and long column. (04 Marks)
- c. Determine the deflection at point B and rotation at A in the beam shown in Fig.Q10(c). Take $E = 200 \text{ kN/mm}^2$ and $I = 200 \times 10^6 \text{ mm}^4$.

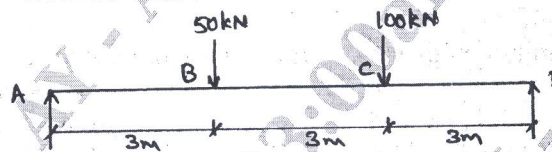


Fig.Q10(c)

(10 Marks)
