

## Fourth Semester B.E. Degree Examination, Dec.2024/Jan.2025 Control Systems

Time: 3 hrs.

Max. Marks: 100

**Note:** 1. Answer any FIVE full questions, choosing ONE full question from each module.  
2. Use of semilog graph sheets are permitted.

### Module-1

- 1 a. Define control system. Distinguish between open loop and closed loop systems with examples. (07 Marks)
- b. For the mechanical system shown in Fig. Q1 (b),
  - (i) Draw mechanical network.
  - (ii) Write difference equations of performance.
  - (iii) Draw electrical network based on force voltage analogy. (08 Marks)




Fig. Q1 (b)

- c. Discuss the effect of feedback on,
  - (i) Overall gain
  - (ii) Stability (05 Marks)

OR

- 2 a. For the electromechanical system shown in Fig. Q2 (a), determine the transfer function  $\frac{X(s)}{E(s)}$ . (10 Marks)

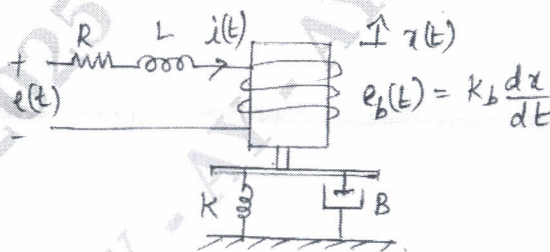


Fig. Q2 (a)

- b. For the mechanical system shown in Fig. Q2 (b),
  - (i) Draw the mechanical network
  - (ii) Draw electrical network based on torque-current analogy
  - (iii) Write performance equations. (10 Marks)

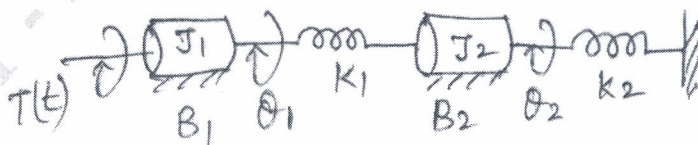


Fig. Q2 (b)





**Module-3**

- 5 a. With the help of graphical representation and mathematical expression, explain the following test signals : (i) Step signal (ii) Ramp signal (iii) Parabolic signal (iv) Impulse signal. (08 Marks)
- b. For a unity negative feedback control system with  $G(s) = \frac{50}{s(s+5)}$ , find the following :  
 (i) Percentage overshoot for unit step input.  
 (ii) Settling time for a unit step input.  
 (iii) Steady state error for an input defined by polynomial  $r(t) = 2 + 4t + 6t^2$ ;  $t \geq 0$ . (08 Marks)
- c. Define rise time and maximum overshoot and also write their formula for II order systems. (04 Marks)

**OR**

- 6 a. For a unity feedback control systems, the open loop transfer function  $G(s) = \frac{10(s+2)}{s^2(s+1)}$  find,  
 (i) The position, velocity and acceleration error constants.  
 (ii) The steady state error when input is  $R(s)$  where  $R(s) = \frac{3}{s} - \frac{2}{s^2} + \frac{1}{3s^3}$  (08 Marks)
- b. With the help of general block diagrams, explain the following :  
 (i) PD type of controller.  
 (ii) PI type of controller. (08 Marks)
- c. The unit step response of a system is given by  $C(t) = \frac{5}{2} + 5t - \frac{5}{2}e^{-2t}$ . Find transfer function and identify order of system. (04 Marks)

**Module-4**

- 7 a. The open loop transfer function of unity feedback system is given by,  
 $G(s) = \frac{K(s+1)}{s^3 + as^2 + 2s + 1}$ . Determine the value of K and a so that system oscillates at frequency of 2 rad/sec. (08 Marks)
- b. State and explain Routh's stability criterion for determining the stability of the system and mention its limitations. (06 Marks)
- c. Sketch the root locus plot for a negative feedback control system having an open loop transfer function,  
 $G(s)H(s) = \frac{K}{s(s+1)(s+2)}$ . (06 Marks)

**OR**

- 8 a. The open loop transfer function of a system is  $G(s) = \frac{K}{s(1+s)(1+0.1s)}$ . Determine the values of K such that,  
 (i) Gain margin = 10 dB  
 (ii) Phase margin =  $24^\circ$ .  
 Use Bode plot. (12 Marks)
- b. Define the following terms in connection with bode plots :  
 (i) Gain cross over frequency  
 (ii) Phase cross over frequency  
 (iii) Gain margin  
 (iv) Phase margin (08 Marks)

**Module-5**

- 9 a. Sketch the polar plot for open loop transfer function,  $G(s)H(s) = \frac{10}{(s+2)(s+4)}$ . Determine gain cross over frequency, phase cross over frequency, gain margin, phase margin. Also comment on stability. (10 Marks)
- b. Explain Nyquist stability criterion and also list the advantages of Nyquist plot. (05 Marks)
- c. Write a short note on lead compensator. (05 Marks)

**OR**

- 10 a. List the properties of state transition matrix. (05 Marks)
- b. Obtain state transition matrix  $\phi(t)$  of the following system:  

$$\begin{bmatrix} \dot{x}_1 \\ \dot{x}_2 \end{bmatrix} = \begin{bmatrix} 0 & 1 \\ -2 & -3 \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \end{bmatrix}$$
 Also obtain the inverse of state transition matrix  $\phi^{-1}(t)$ . (10 Marks)
- c. Define : (i) State variables  
 (ii) State vector  
 (iii) State space (05 Marks)

\* \* \* \* \*